


PASSLOCK (DATA), ALARM AND ELECTRIC DOORLOCKS
CONTROL MODULE FOR CAVALIER - SUNFIRE - SATURN

Programming sequence:

- 1- Locate and press the programming switch while inserting the harness connector into the GMDACAV module.
The LED status indicator will turn ON to indicate the programming mode.
Keep programming button pressed and turn the ignition key to the ON position.
When the LED status turns OFF, release the programming button.
Within a few seconds, the electric door locks will automatically lock and unlock and the LED status indicator will flash rapidly.
(The INT-CAV-PDA module door lock control feature is now programmed). Keep ignition key ON and go to step 2.
- 2- While remaining in programming mode, start the vehicle utilizing the key. The LED status indicator will turn OFF.
(The Passlock control feature is now programmed).
Turn the key to the OFF position, The module is ready and functional.

Note : If during Step 1, the door locks do not automatically activate within 45 seconds, the LED status indicator will flash slowly indicating the door lock control feature has failed or the door lock control feature has previously been programmed. If the door lock control feature has previously been programmed, lightly press the programming switch once while the LED status indicator flashes slowly. The LED status indicator will then flash rapidly. Proceed to step 2.
If programming of the door lock control feature fails, return to Step 1 and begin again.

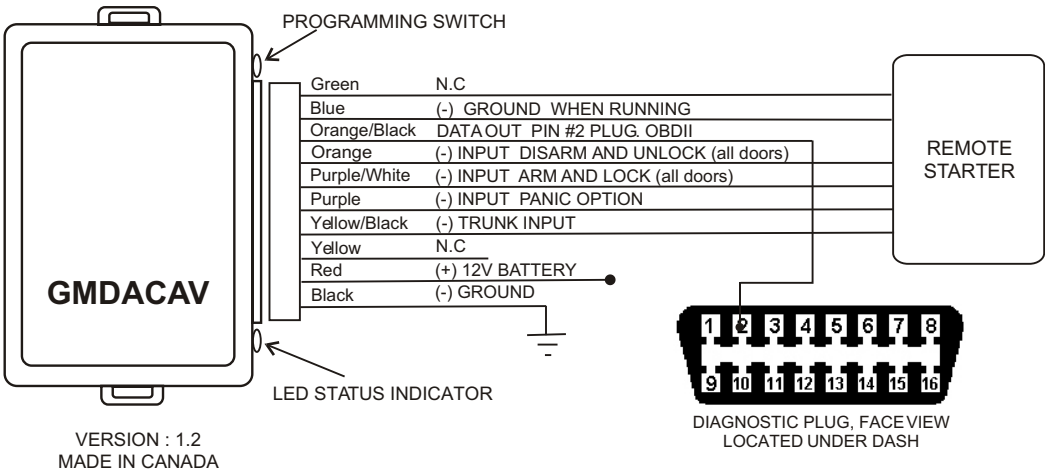

VEHICLE :

CAVALIER 2000 TO 2004
SUNFIRE 2000 TO 2004

SATURN S SERIE
2000 TO 2003

TECHNICAL SUPPORT :


Note: Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects.

PASSLOCK (DATA), ALARM AND ELECTRIC DOORLOCKS
CONTROL MODULE FOR CAVALIER - SUNFIRE - SATURN

Programming sequence:

- 1- Locate and press the programming switch while inserting the harness connector into the GMDACAV module.
The LED status indicator will turn ON to indicate the programming mode.
Keep programming button pressed and turn the ignition key to the ON position.
When the LED status turns OFF, release the programming button.
Within a few seconds, the electric door locks will automatically lock and unlock and the LED status indicator will flash rapidly.
(The INT-CAV-PDA module door lock control feature is now programmed). Keep ignition key on and go to step 2.
- 2- While remaining in programming mode, start the vehicle utilizing the key. The LED status indicator will turn OFF.
(The Passlock control feature is now programmed).
Turn the key to the OFF position, The module is ready and functional.

Note : If during Step 1, the door locks do not automatically activate within 45 seconds, the LED status indicator will flash slowly indicating the door lock control feature has failed or the door lock control feature has previously been programmed. If the door lock control feature has previously been programmed, lightly press the programming switch once while the LED status indicator flashes slowly. The LED status indicator will then flash rapidly. Proceed to step 2.
If programming of the door lock control feature fails, return to Step 1 and begin again.

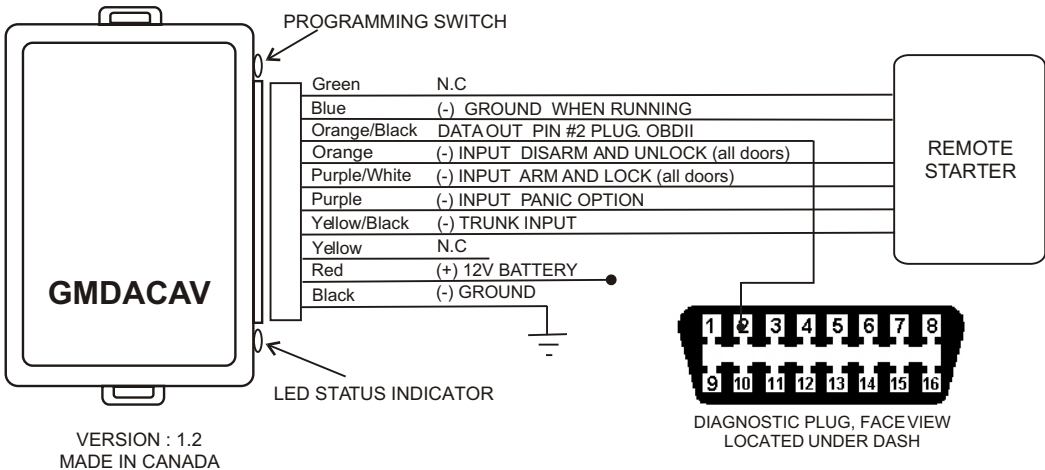

VEHICLE :

CAVALIER 2000 TO 2004
SUNFIRE 2000 TO 2004

SATURN S SERIE
2000 TO 2003

TECHNICAL SUPPORT :

Note: Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects.