

PATS KIA 2

TRANSPONDEUR BYPASS MODULE FOR KIA

VEHICLE :


AMANTI 2004 à 2006

The KIA SCAN TOOL is required to programm this module.

Programming procedure :


You must have all keys available (3 keys). You will need the KIA SCAN TOOL and associated cartridge for keys programming.

- 1- Hook up the SCAN TOOL.
 - 2- Follow instructions on SCAN TOOL display for keys programming procedure (teaching procedure) .
 - 3- Place the Pats KIA 2 module near the front of the ignition switch for the next 2 steps.
 - 4- With the help of a jumper wire, power up vehicles ignition 12V.
 - 5- Follow instructions on SCAN TOOL.
 - 6- Remove jumper wire and also Pats KIA 2 module.
 - 7- Make shure all other keys still working.
 - 8- Connect Pats KIA 2 module and start vehicle with remote starter.
- The module Pats KIA 2 is now programmed.

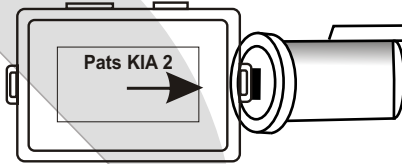

Place close and toward ignition switch for program

Installation :

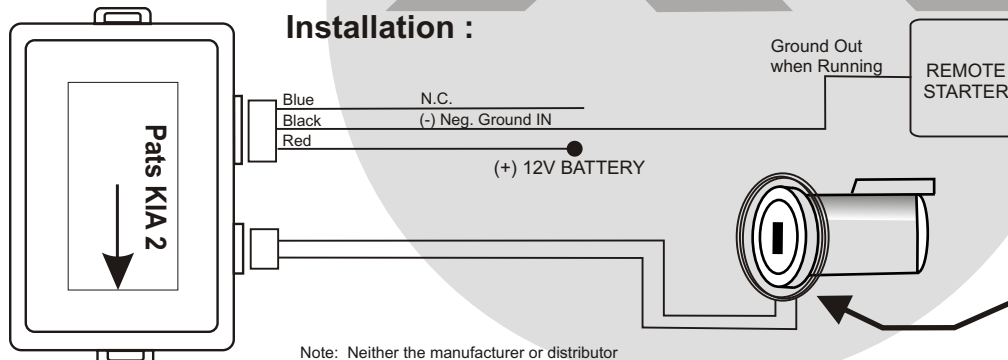

TECHNICAL SUPPORT:

TEL : 514-255-0446
FAX: 514-255-1367
Web: <http://support.fortinautoradio.com>

3 to 5 turns of loop around the ignition key are required.

IMPORTANT : Once the Pats KIA 2 is programmed, it **cannot** be programmed or use for and other vehicle

MADE IN CANADA

VERSION : 3.0.B
28 Oct. 2005

Note: Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects.

PATS KIA 2

TRANSPONDEUR BYPASS MODULE FOR KIA

VEHICLE :


AMANTI 2004 à 2006

The KIA SCAN TOOL is required to programm this module.

Programming procedure :


You must have all keys available (3 keys). You will need the KIA SCAN TOOL and associated cartridge for keys programming.

- 1- Hook up the SCAN TOOL.
 - 2- Follow instructions on SCAN TOOL display for keys programming procedure (teaching procedure) .
 - 3- Place the Pats KIA 2 module near the front of the ignition switch for the next 2 steps.
 - 4- With the help of a jumper wire, power up vehicles ignition 12V.
 - 5- Follow instructions on SCAN TOOL.
 - 6- Remove jumper wire and also Pats KIA 2 module.
 - 7- Make shure all other keys still working.
 - 8- Connect Pats KIA 2 module and start vehicle with remote starter.
- The module Pats KIA 2 is now programmed.

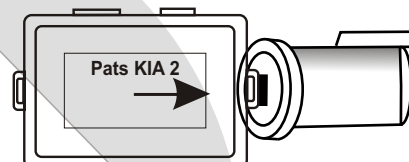

Place close and toward ignition switch for program

Installation :

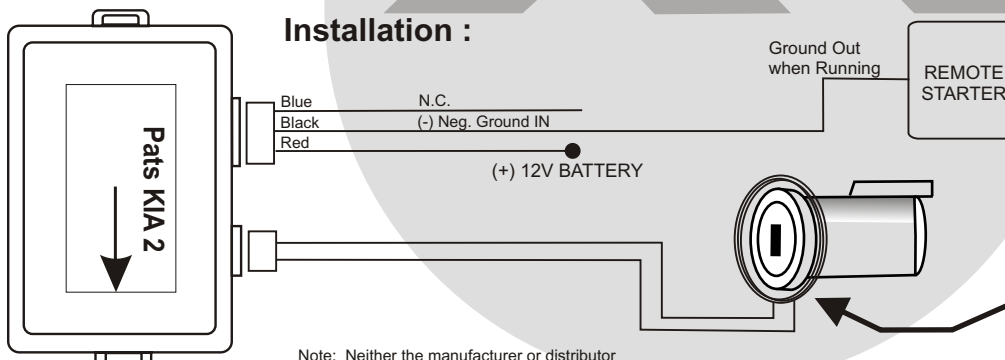

TECHNICAL SUPPORT:

TEL : 514-255-0446
FAX: 514-255-1367
Web: <http://support.fortinautoradio.com>

3 to 5 turns of loop around the ignition key are required.

IMPORTANT : Once the Pats KIA 2 is programmed, it **cannot** be programmed or use for and other vehicle

MADE IN CANADA

VERSION : 3.0.B
28 Oct. 2005

Note: Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects.