



REVO

GUIDE # 88751 - REV.: 20190715




Parts required (not included):

1x **FLASH-LINK UPDATER**

1x Microsoft Windows Computer with Internet connection

1

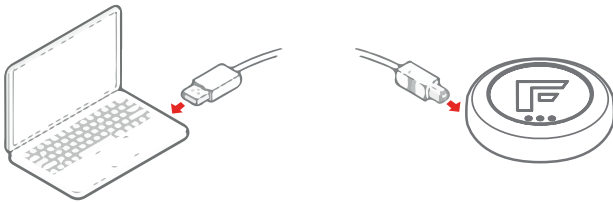


Plug in the **FLASH-LINK UPDATER** into the computer's USB port with the provided USB cable.

2




Run Flash Link Manager Software.

3

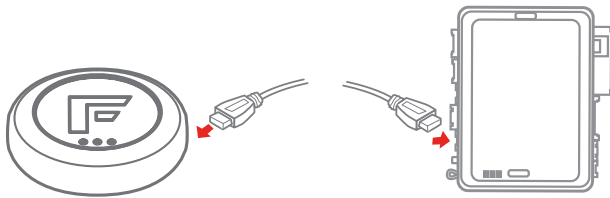

Plug in the **EVO-ONE** into the **FLASH-LINK UPDATER** with provided **DATALINK** cable.

4

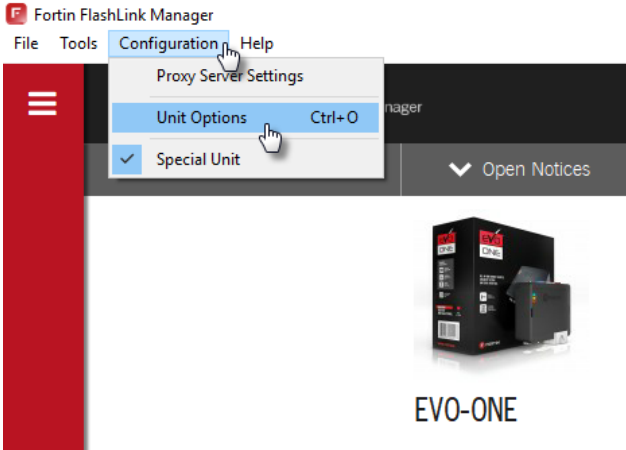


Fortin FlashLink Manager
File Tools Configuration Help
Proxy Server Settings
Unit Options Ctrl+O
Special Unit
Open Notices

EVO-ONE

Once the flashing is done,
CLICK on **CONFIGURATION**
then **UNIT OPTIONS**.


5

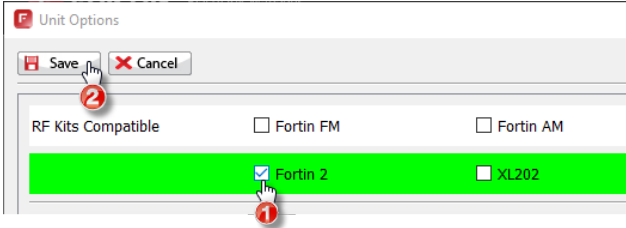

Unit Options
Save Cancel
RF Kits Compatible Fortin FM Fortin AM
 Fortin 2 XL202


SELECT Fortin2,
CLICK SAVE,
wait for the window to disappear

6

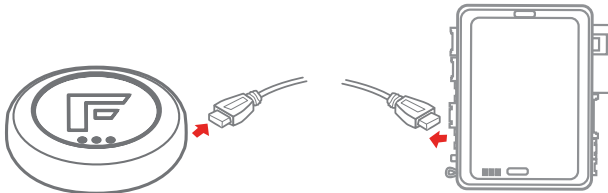

Disconnect the EVO-ONE.

7

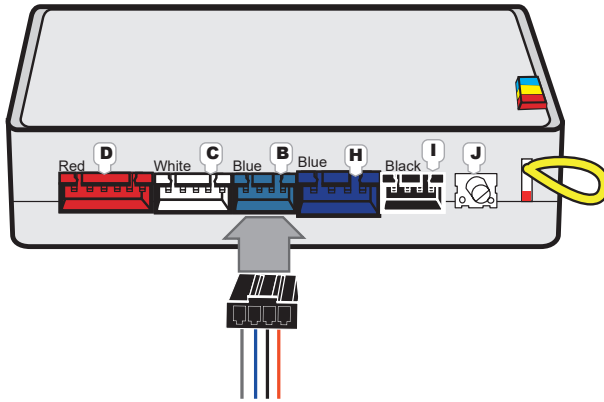

CONNECT the REVO in the Blue 4pin connector with clip of the EVO-ONE using a 4pin connector with clip.

Do not force in an incompatible connector.

8

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	STEP 6
 Turn the Ignition ON.	 Turn the Ignition OFF.	 Turn the Ignition ON.	 Press and release the brake pedal four times.	 On each Transmitter press and release the LOCK button	 Turn the Ignition OFF to exit programming.
WITH VALET SWITCH Turn the Ignition ON.	 Press and hold Valet switch until the side red light flash on EVO-ONE then release.	 Press and release the valet switch five time. The parking lights will flash and the horn/siren will chirp each time to confirm.	 Press and release the brake pedal once.	On each Transmitter press and release the LOCK button	Turn the Ignition OFF to exit programming.

To program the remotes on the EVO-ONE, Turn IGNITION ON. Press and hold Valet switch until the side red light flash on EVO-ONE then release. Press and release the Valet switch 5 times. Press and release the Brake pedal once. Press lock one any remote. Turn IGNITION OFF.

OR

Turn the ignition ON, Turn the ignition OFF, Turn the ignition ON and press 4 times on the brake pedal. Press lock one any remote. Turn IGNITION OFF.

- MODE 1 - LOCK
- MODE 2 - UNLOCK
- MODE 3 - TRUNK
- MODE 4 - START
- MODE 5 - AUX.1
- MODE 6 - AUX.2

If you want to change EVO-ONE options, use the following button mapping.S



WARNING

NOTICE The manufacturer will accept no responsibility for any electrical damage resulting from improper installation of the product, including either damage to the vehicle itself or to the remote-starter module. This module must be installed by a certified technician including all of the supplied safety devices. Please note that this guide has been written for trained professional technicians, a certain level of skills and knowledge is therefore assumed.

Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects. This module must be install by qualified technician. This instruction guide may change without notice.

To download the installation guide, user guide, or the latest quick installation guide, visit: www.fortin.ca

Technical support: TEL: 514-255-4357 / 1-877-336-7797

Copyright © 2019, FORTIN AUTO RADIO INC ALL RIGHTS RESERVED MADE IN CANADA

REV.:20190517