



OMEGALINK

GUIDE # 90791 - REV.: 20211102



OL-RF-52-SST
2-way
5-button RF Kit



OL-RF-15-SST
2-way
1-button RF Kit



OL-RF-42-SST
2-way
5-button RF Kit



OL-RF-12-SST
1-way
1-button RF Kit



OL-RF-32-SST
1-way
5-button RF Kit




Parts required (not included):

1x **FLASH-LINK UPDATER**

1x Microsoft Windows Computer with Internet connection

1

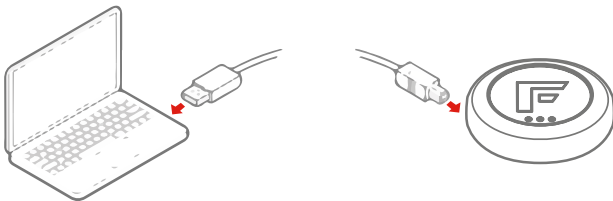


Plug in the **FLASH-LINK UPDATER** into the computer's USB port with the provided USB cable.

2



Run Flash Link Manager Software.

3

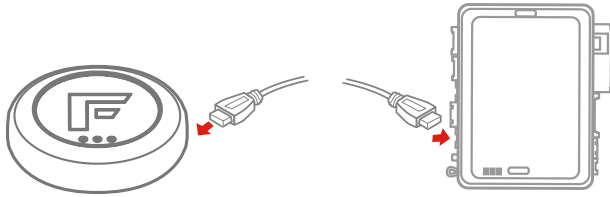

Plug in the **EVO-ONE** into the **FLASH-LINK UPDATER** with provided **DATALINK** cable.

4



CLICK on the remote starter tab.

5



CLICK on VIEW OTHER FIRMWARE, scroll down.

6



SELECT and flash version **OM 0.44 FOR OMEGALINK.**

UPDATE TO VERSION 0.[44]


You are about to change the firmware of your device to **Version 0.[44]**.

6







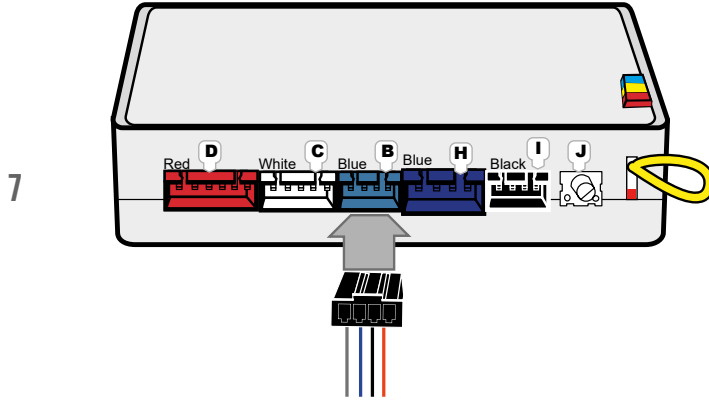



CLICK on CONFIRM.





CONNECT the **OMEGALINK** in the Blue 4pin connector with clip of the EVO-ONE using a 4pin connector with clip.

Do not force in an incompatible connector.

	WITH IGNITION SWITCH	WITH VALET SWITCH
8	 <p>Turn the Ignition ON.</p>	 <p>Turn the Ignition ON.</p>
9	 <p>Turn the Ignition OFF.</p>	 <p>Press and hold the Valet button until the RED light flashes on EVO-ONE, then release it</p>
10	 <p>Turn the Ignition ON.</p>	 <p>Press and release the valet switch five time. The parking lights will flash and the horn/siren will chirp each time to confirm.</p>
11	 <p>Press and release the brake pedal four times.</p>	 <p>Press and release the brake pedal once.</p>

12



On each Transmitter press and release the  LOCK button



On each Transmitter press and release the  START button

13	 <p>Turn the Ignition OFF.</p>	 <p>Turn the Ignition OFF.</p>
----	---	---

MODE 1 - LOCK
MODE 2 - UNLOCK
MODE 3 - TRUNK
MODE 4 - START
MODE 5 - AUX.1
MODE 6 - AUX.2

If you want to change EVO-ONE options, use the following button mapping.S



WARNING

NOTICE The manufacturer will accept no responsibility for any electrical damage resulting from improper installation of the product, including either damage to the vehicle itself or to the remote-starter module. This module must be installed by a certified technician including all of the supplied safety devices. Please note that this guide has been written for trained professional technicians, a certain level of skills and knowledge is therefore assumed.

Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects. This module must be install by qualified technician. This instruction guide may change without notice.

To download the installation guide, user guide, or the latest quick installation guide, visit: www.fortin.ca

Technical support: TEL: 514-255-4357 / 1-877-336-7797

Copyright © 2019, FORTIN AUTO RADIO INC ALL RIGHTS RESERVED MADE IN CANADA

REV.:20190517